



# Replacement LCD Display

Written By: Felice Suglia





## TOOLS:


- [Phillips 0 Screwdriver](#) (1)
-

## Step 1 — Battery





- Unlock the latch for fixing the battery to the right.
- Unlock the fixing bolt from the battery to the left.
- Remove the battery pack from the slot.

## Step 2 — LCD screen

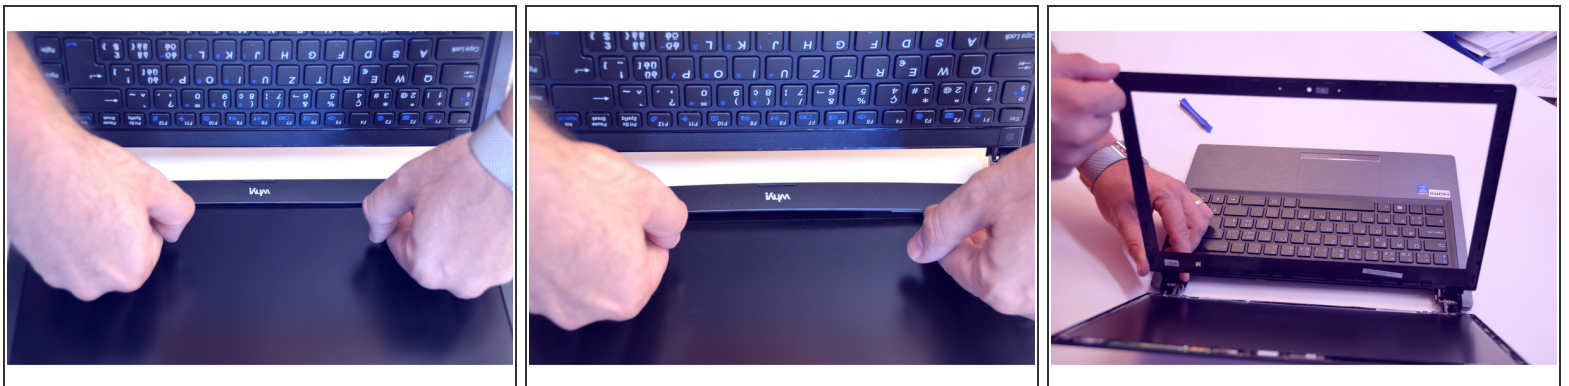




- Gently insert the nail between the frame of the screen and the glass of the screen.
- De-clipped one by one the frame mounting points surrounding the LCD screen.

## Step 3

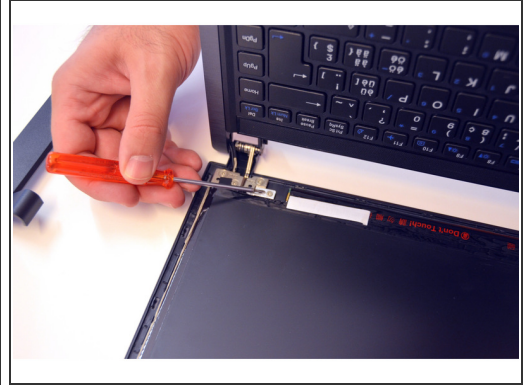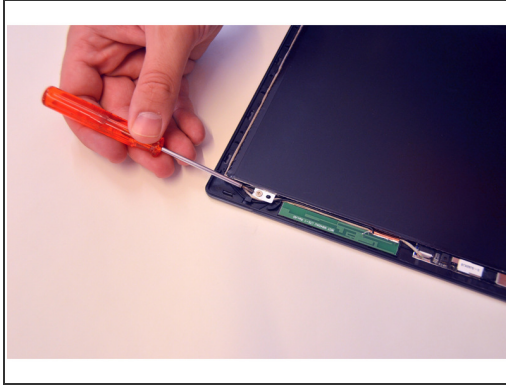

- completely detach the frame surrounding the LCD screen.
- Locate the 2 screws on top mounting of the LCD. Unscrew.
- Locate the two lower mounting screws from the LCD. Unscrew.


## Step 4

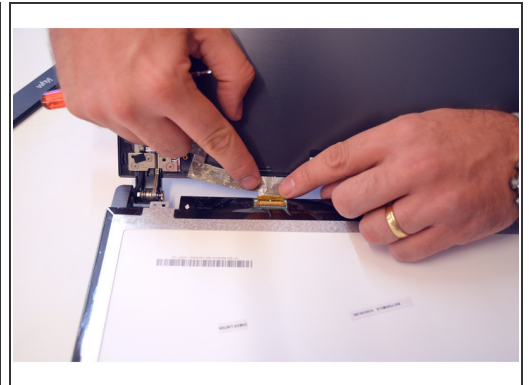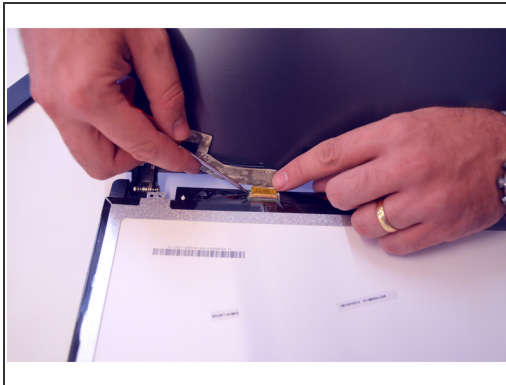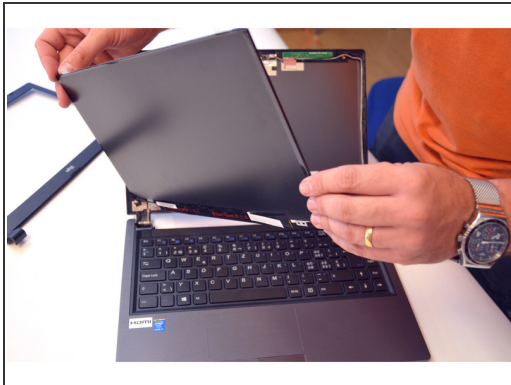

- Carefully place the LCD on the keyboard.
- Locate connector of the LCD.
- Release the cable.



## Step 5

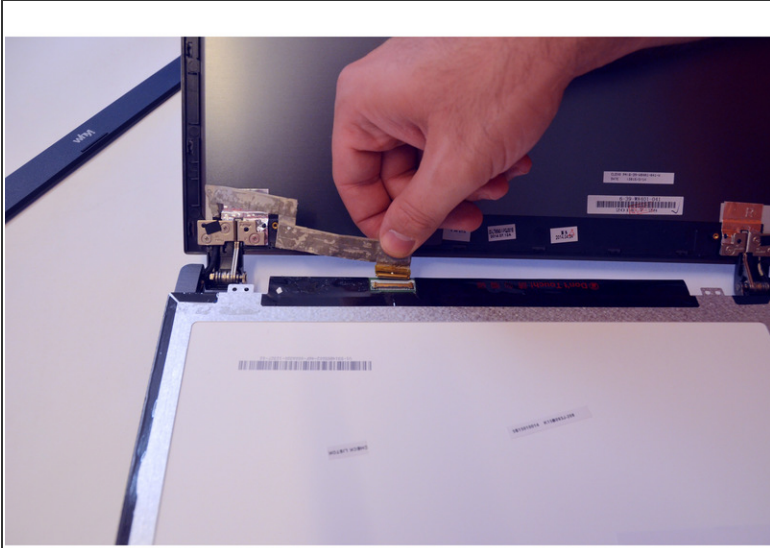

- Remove the connector.
- After removing the connector, remove the LCD monitor.

Pour le remontage, suivre les instructions dans l'ordre inverse.

This document was last generated on 2017-07-08 01:55:36 PM.